

C-Series Remote Operated Module

The Carling Technologies Remote Operated Circuit Breaker (ROCB) combines the convenience of remote ON, OFF and Reset capability, with the safety and accuracy of a standard magnetic current sensing device, thus allowing operation of the breaker from various locations in a system, facility or site (while not sacrificing the ability to manually operate the breaker if required). With the ROCB, service, diagnostics, load shedding and power distribution control functions can now be performed in areas that were previously unattended, inaccessible or unsafe.

The ROCB module allows remote operation of the C-Series panel mount breaker, or the D-Series DIN rail mount breaker (up to 3 poles) through hard wiring with a single pole, double throw switch connected to a standard power source, or more sophisticated relay and modem networks.

The ROCB module can be mounted to either side of the host breaker, while occupying only the width of a standard C-Series pole. Several interface methods are available. Remote physical actuation of the host circuit breaker is achieved by connecting the ROCB module's handle with the breakers. Being based on the C-Series breaker, the ROCB allows easy adaptation into existing panel designs. In addition, its' compact size allows efficient use of space for new design applications. With the ROCB, Carling has designed a versatile, compact and reliable solution -- in a hydraulic/magnetic circuit breaker or switch only device that can be operated both manually and remotely.

Design Features include:

- ON-OFF and trip indication
- Load shedding
- Energy management
- Compact size
- Automatic reset capable
- Choice of interface styles
- Panel or DIN rail mounting
- Manual Operation Override
- Fits into industry standard cut-out


ROCB Motor Specifications:

- Voltage input: 12 VDC to 80 VDC
- Start current: < 1 amp
- Switching time: < 2 seconds



To order a remote operated circuit breaker, add / plus the remote module part number to the end of the C-Series circuit breaker catalog number. ex. CA1BO24620121C/RB1110BU1C

Match color & mounting inserts of breaker.

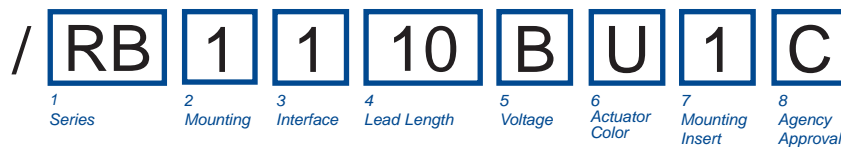

1 SERIES			
RB			
2 MOUNTING POSITION			
As viewed from back of breaker, line side up, pole 1 left.			
0	n/a - ordered separate from breaker		
1	Left Side		
2	Right Side		
3 INTERFACE			
1	Flying Leads		
2	Integral Connector		
3	Flying Leads w/ 4 pin dual row connector (female)		
4	Flying Leads w/ 4 pin dual row connector (male)		
4 LEAD LENGTH			
00	No Lead	11	11"
01	1"	12	12"
02	2"	13	13"
03	3"	14	14"
04	4"	15	15"
05	5"	16	16"
06	6"	17	17"
07	7"	18	18"
08	8"	19	19"
09	9"	20	20"
10	10"	21	21"
11		22	22"
12		23	23"
13		24	24"
14		25	25"
15		26	26"
16		27	27"
17		28	28"
18		29	29"
19		30	30"

5 VOLTAGE RATING			
A	12 VDC	C	41-80 VDC
B	20-40 VDC	D	120 VDC
		E	240 VDC

6 ACTUATOR COLOR & LEGEND³					
Actuator Color	No legend	I-O	ON-OFF	Dual	Legend Color
White	T	A	B	1	Black
Black	U	C	D	2	White
Red	V	F	G	3	White
Yellow	W	M	N	6	Black

7 MOUNTING INSERT	
1	6-32 x 0.195"
2	ISO M3 x 5mm

8 AGENCY APPROVAL	
C	UL Recognized & CSA Certified
E	TUV Certified, UL Recognized & CSA Certified
G	UL 489 Listed & CSA Certified
I	UL 1500 Ignition Protected, UL Recognized & CSA Certified

Notes:
 1 Available with integral connector only.
 2 Integral and 4-pin dual row connectors not available with agency approval G: UL 489.
 3 TUV or VDE certified units must have I-O or dual legends. UL489 listed units must have ON-OFF or dual legends.